

**TVT**

**Secure The World With You**



# **TD-7524AE2L**

**2 MP HD IR Dome Camera**

**TVT**

**TVT DIGITAL TECHNOLOGY CO., LTD.**

**Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay  
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong  
Province, P.R.China**


**Tel: +86-755-36995888**

**Fax: +86-755-33104777**

**Web site: <http://en.tvt.net.cn>**

**E-mail: [overseas@tvtnet.cn](mailto:overseas@tvtnet.cn)**


## 2 MP HD IR Dome Camera

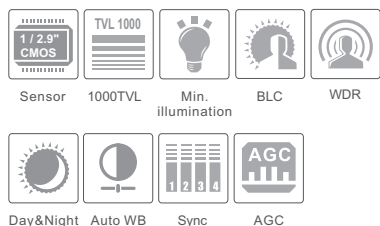

### Features

- 1080P real time image, high resolution, true color
- AHD/TVI/CVI/CVBS lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 10 ~ 20m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output

### Dimensions

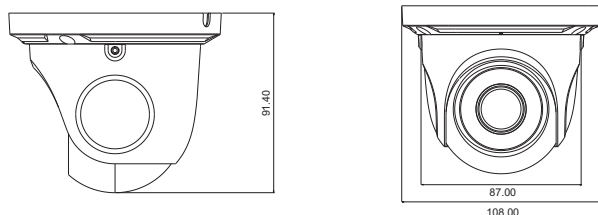

### Available Accessories



TD-YXH0103 TD-YXH0105 TD-YXH0302 TD-YZH0205



TD-YXH0302+ TD-YXH0302+ TD-YZJ0203 TD-YXH0302+  
TD-YZJ0811 TD-YZJ0407+TD-YZJ0501 TD-YZJ0407+TD-YZJ0601

## Specifications

Model	TD-7524AE2L
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 2.9"CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s ( PAL ); 1 / 60s ~ 1 / 100000s ( NTSC )
IR Distance	10 ~ 20 m
Frame Rate	30fps ( 60Hz ), 25fps ( 50Hz )
Min. Illumination	0 Lux ( IR ON )
Lens	2.8mm
Lens Mount	M12
S / N Ratio	≥52dB ( AGC OFF )
Ingress Protection	IP 66
<b>Functions</b>	
Function Control	OSD ( COC Control )
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	Yes
Defog	No
HLC	No
Sharpness	Yes
Mirror	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese / English
Angle Adjustment	Any angle
<b>Others</b>	
Power Supply	DC12V ( ± 10% )
Power Consumption	Day : < 1W; Night : < 3W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % ( relative humidity )
Dimensions ( mm )	Φ 91.4 x 108

### Available Model

Available Model	TD-7524AE2L ( D / IR1 )
-----------------	-------------------------